

SOLAR FLOOD LIGHT

SM-PJ058



SQUARE	SM-PJ058S/1 100W	SM-PJ058S/2 200W	SM-PJ058S/3 300W
OCTAGONAL	SM-PJ058C/1 100W	SM-PJ058C/2 200W	SM-PJ058C/3 300W

RAIN AND LIGHTNING	HIGH CAPACITY BATTERY	SOLAR ENERGY CHARGING
REMOTE CONTROL	FREE WIRING	SMART LIGHT CONTROL

2 PIECES OF POLYCRYSTALLINE SILICON A-CLASS SOLAR PLATE

High conversion solar panel

All aluminum plate frame, high conversion rate, fast charging.

SOLAR PANELS >>> Light energy conversion is more than 20%.	SERVICE LIFE >>> Prolong the service life of the product.	OUTPUT EFFICIENCY >>> Can increase by 10%.
--	---	--

IP65 WATERPROOF

Really waterproof solar lamp

Never afraid of water. effectively prolonging lamp life.

LARGE-CAPACITY LITHIUM BATTERY

Endurance upgrade

Original new battery, large capacity, fast charging, long lights for a long time, built-in protection circuit, long service life.

INTELLIGENT LIGHT CONTROL SENSING

Open the light control mode and automatically charge during the day, the light is automatically turn on at night, no need to turn on the lights manually.

Daytime light charging Automatic lighting at night

Light turn on always working without light control — **ON** — Light turn off without light control — **OFF**

Full light — **☀** — Reduce brightness — **☁**

Increase brightness — **+** — Half light — **☀**

AUTO — **AUTO**

Total 3 hours working time — **3H** — Total 5 hours working time — **5H**

Total 8 hours working time — **8H**

PRODUCT INFORMATION

Guangdong Suiming Photoelectric Co.Ltd



LED HIGH LIGHT CHIPS

Wide moisture -proof waterproof LED high bright light chips life span longer.




DIE-CASTING ALUMINIUM LAMP BODY

The housing is made of die-casting aluminium, good thermal conductivity, firm and durable.



ROTATING BRACKET

The angle of the mounting bracket is adjustable for easy installation.

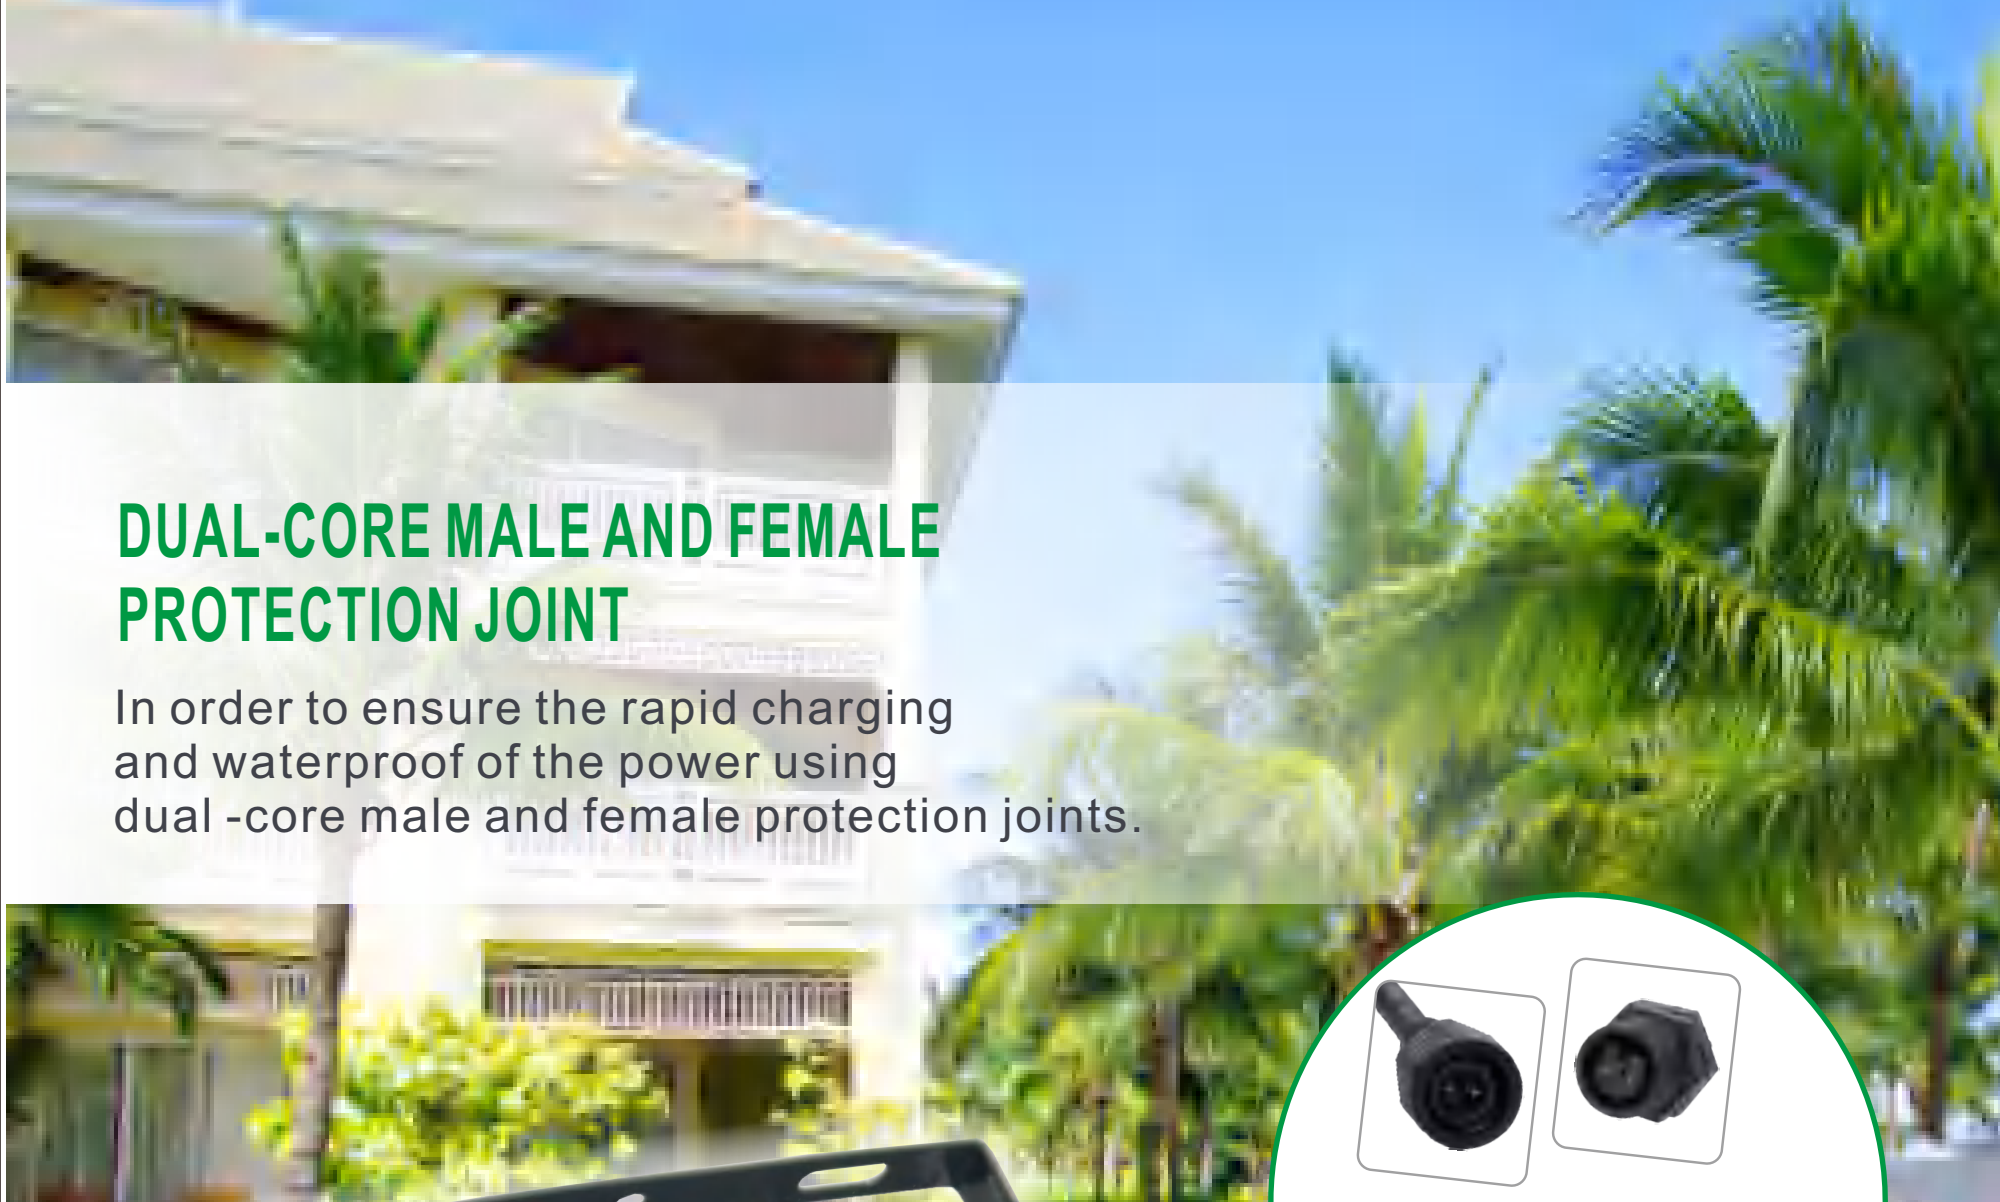




DUAL-CORE MALE AND FEMALE PROTECTION JOINT

In order to ensure the rapid charging and waterproof of the power using dual -core male and female protection joints.



PRODUCTS SHOW



Guangdong Suiming Photoelectric Co.Ltd

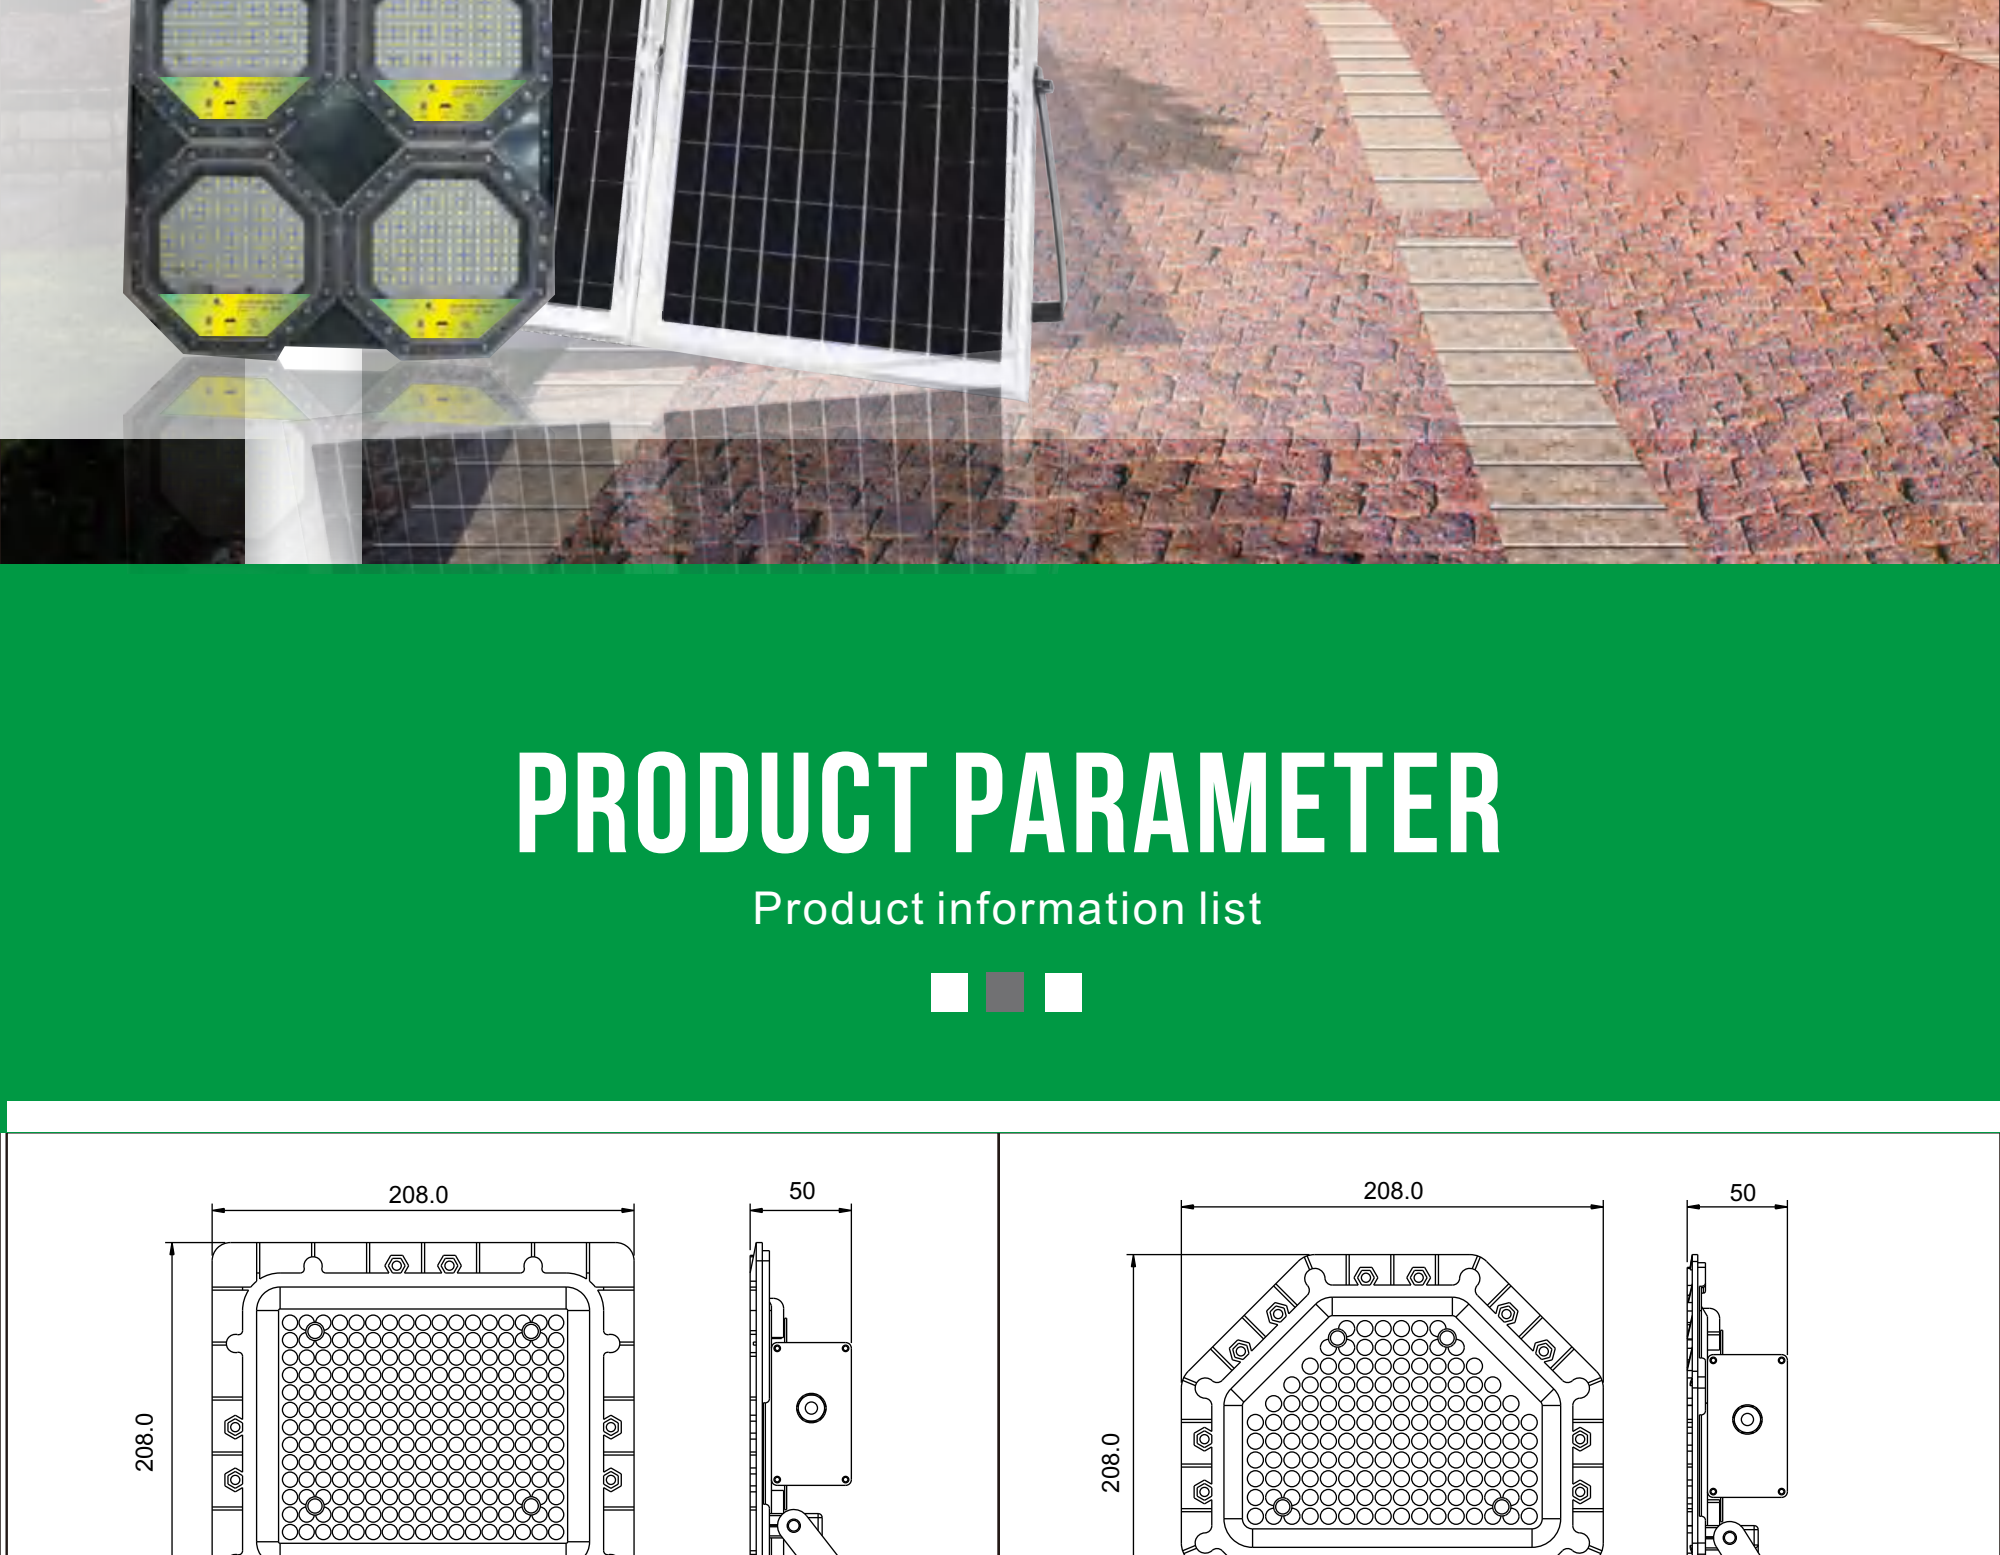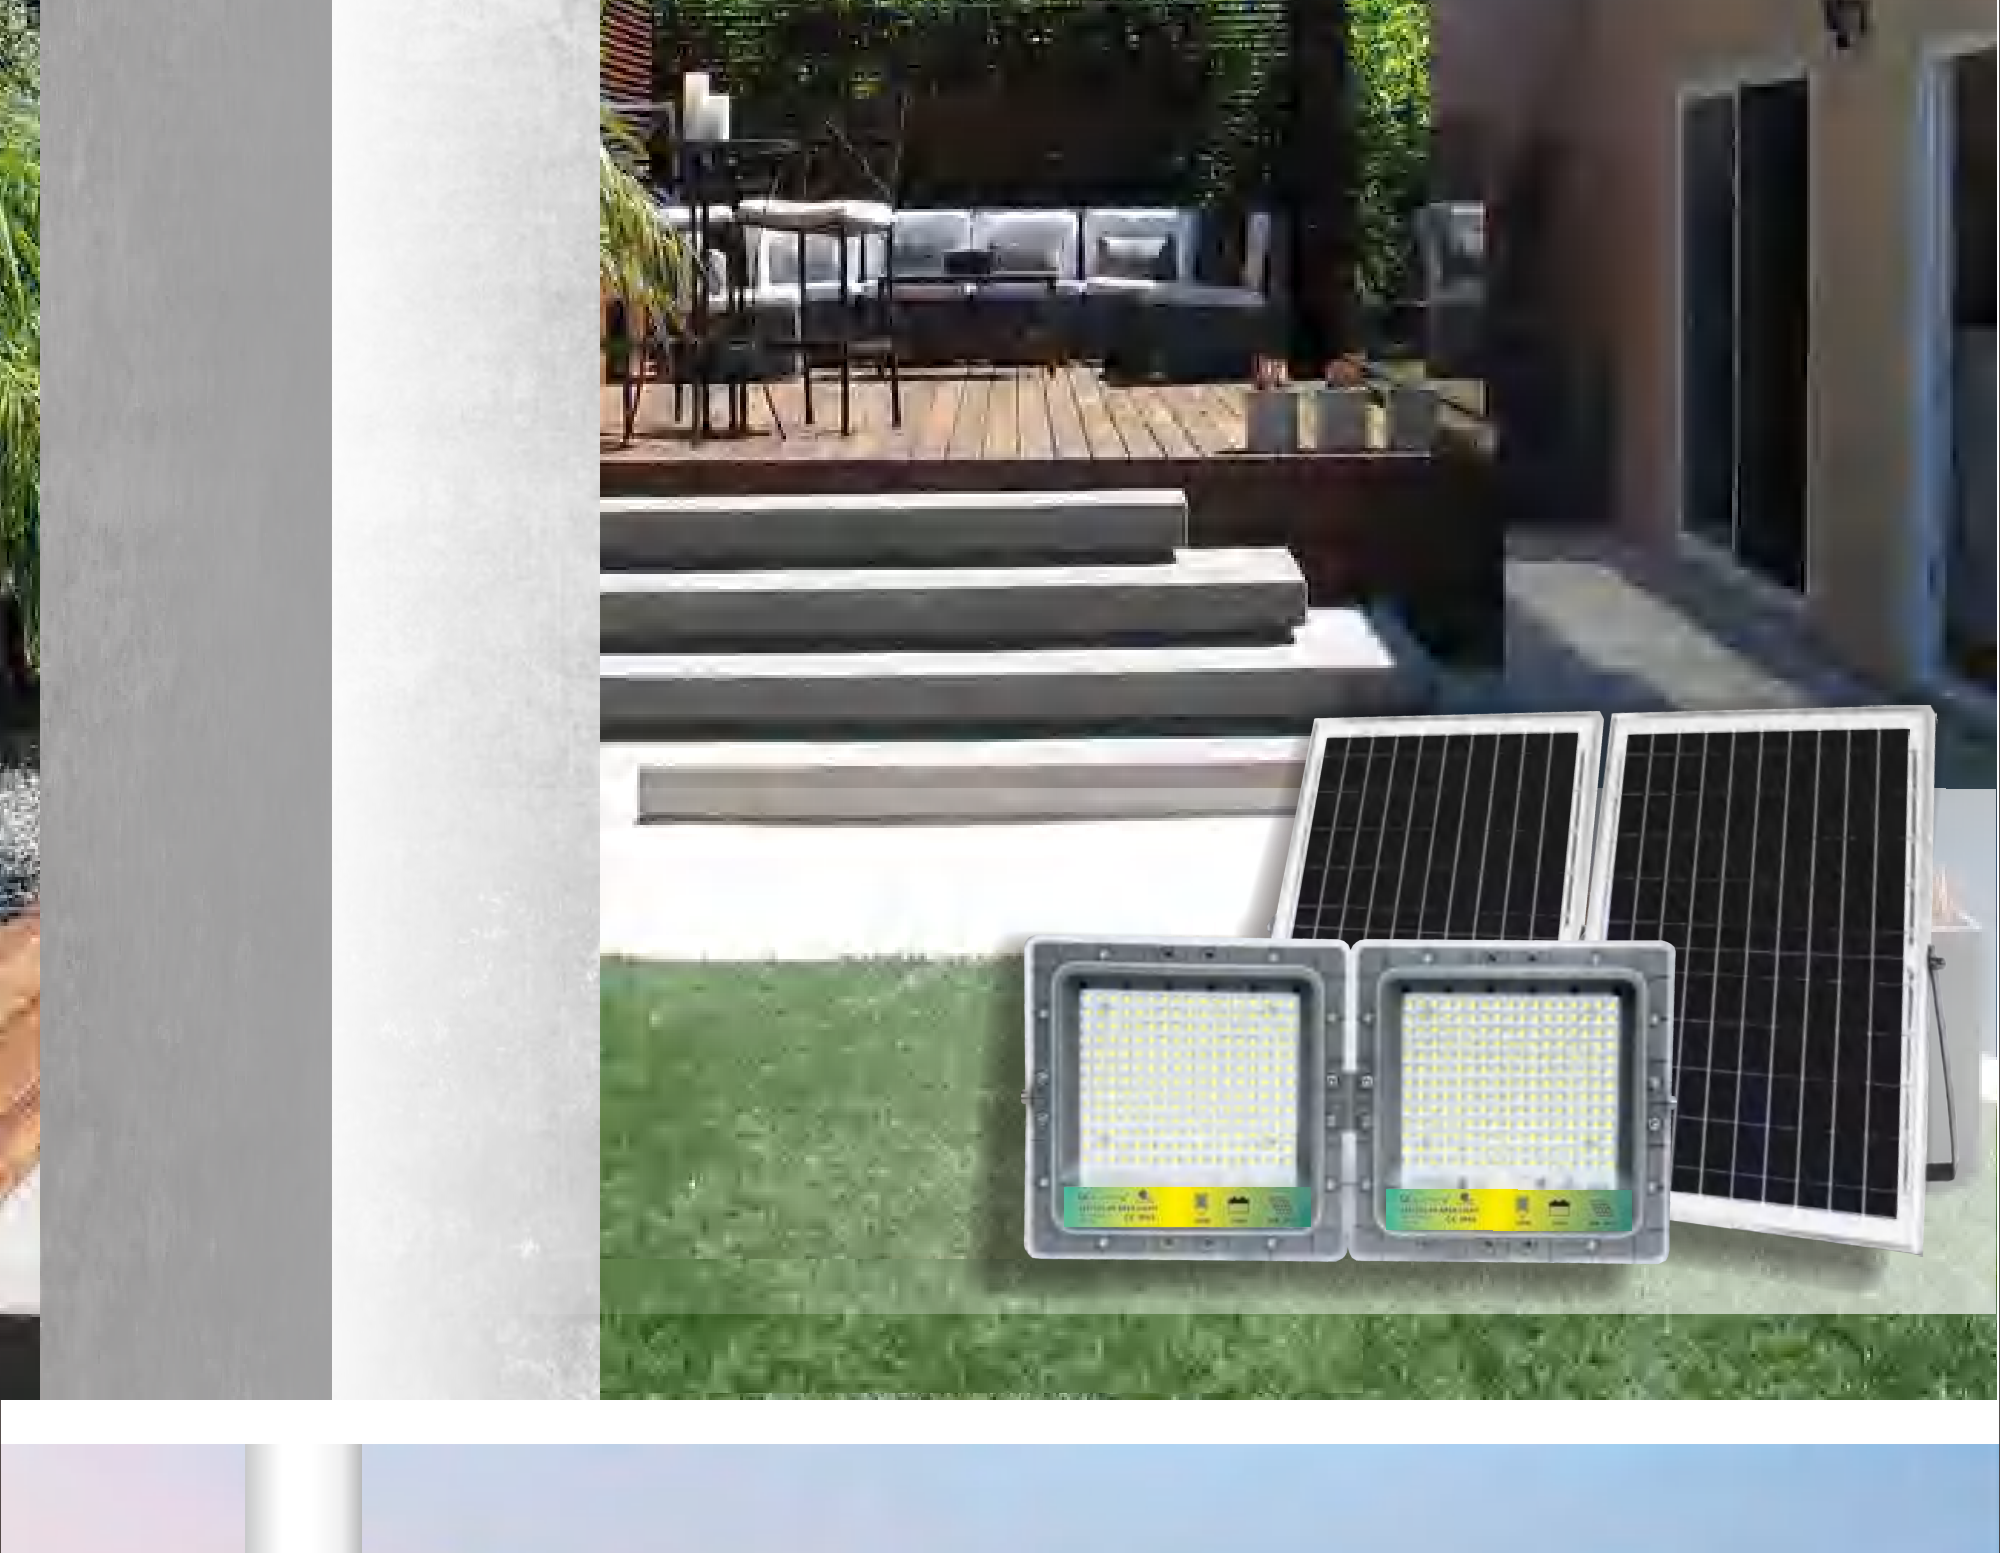

PRODUCT PARAMETER

Product information list

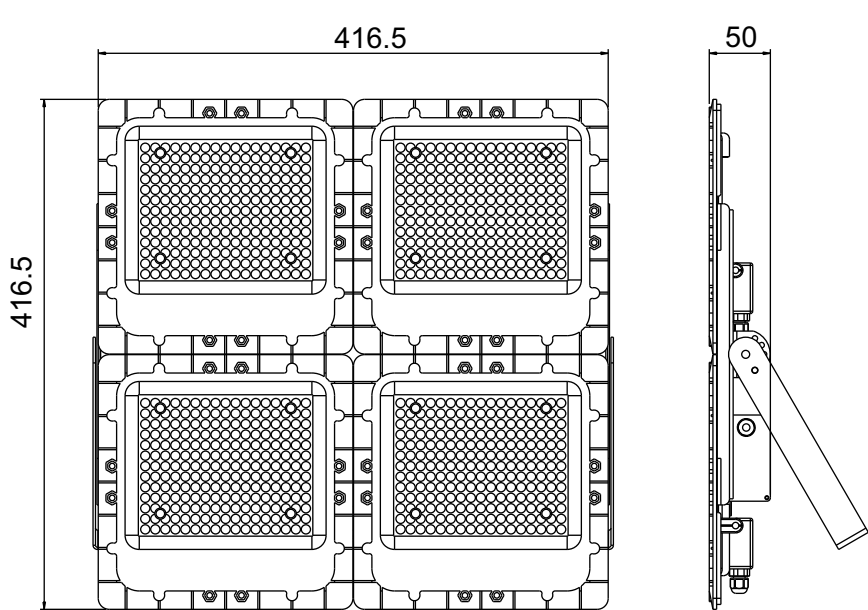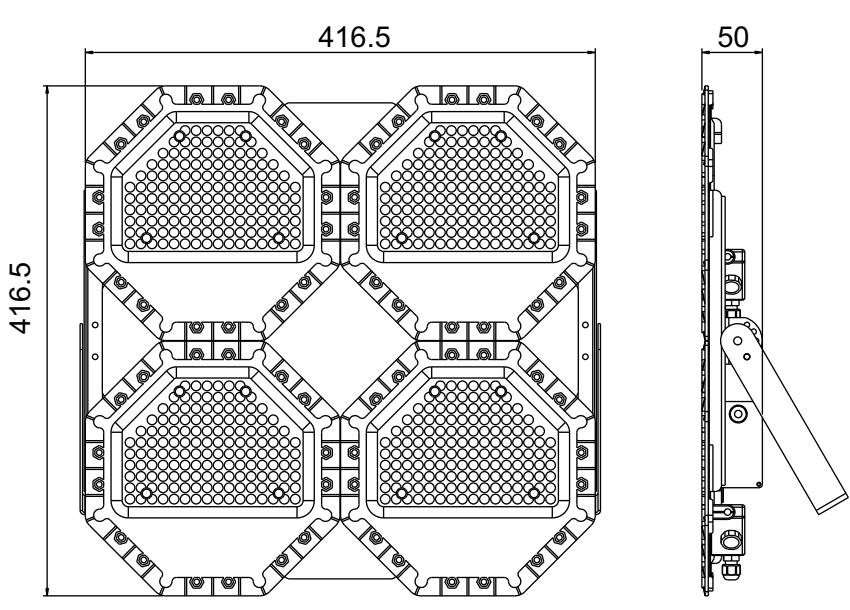

	
SM-PJ058S/3 300W	SM-PJ058C/3 300W

Model	SM-PJ058	Material	Aluminum
Light source	LED 2835	Battery	32700 LiFePO4
Charging time	5 - 7 hours	Discharge time	12-16 hours
Function	Light control + remote control + charging indicator light		

Watts	solar panel size (MM)	Carton size(MM)	Solar panels	Battery capacity
100W	235x350x15(2pcs)	245x90x360 (5pcs/ctn)	10V/10W	6.4V/12AH
200W	350x450x15(2pcs)	365x85x465 (4pcs/ctn)	10V/18W	6.4V/24AH
300W	530x350x15(2pcs)	430x85x545 (2pcs/ctn)	10V/25W	6.4V/36AH